

## FEATURES

- Single stage, direct-driven
- Air-cooled, no water required
- Simple installation
- Low noise levels
- Compact design
- Integral exhaust filter, oil free discharge air
- Includes pressure gauge

## APPLICATIONS


- Meat packing
- Food processing
- Thermoforming
- Composites
- Medical
- Laboratory
- Vacuum cooling
- Robotics
- Degassing
- Autoclaves

## OPTIONAL ACCESSORIES

- Pre-Assembled Vacuum Kit Available (KVRXA-16): Includes all plumbing, filtration, check-valves, regulating valves, and gauges required for quick installation and easy maintenance.

## PERFORMANCE (60HZ)



RXA-16

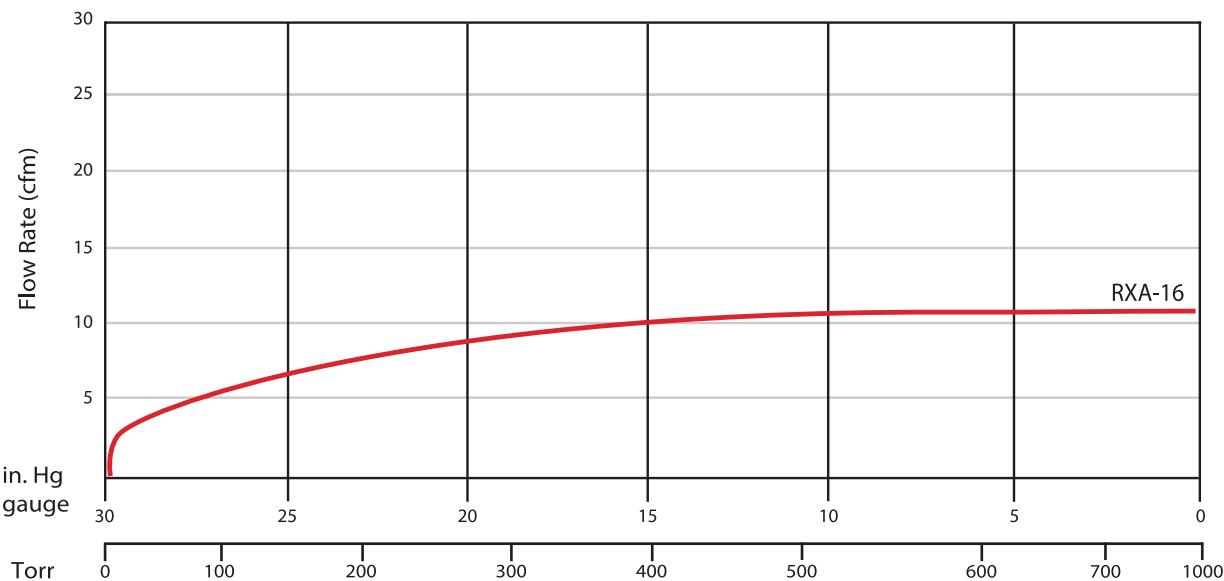

Model	Phase	Displacement (cfm)	Ultimate Continuous Vacuum (inHg/Torr)	Motor Output (hp)	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Oil Capacity (L)
<b>RXA-16</b>	3	11	29.86/1.5	1	1800	230/460	TBD	60	48	0.5

All measurements are  $\pm 10\%$ . Standard motor is Class 1 Div 2.

## APPROXIMATE DIMENSIONS

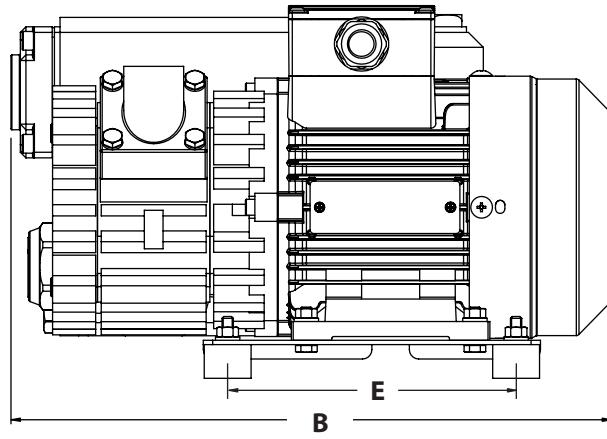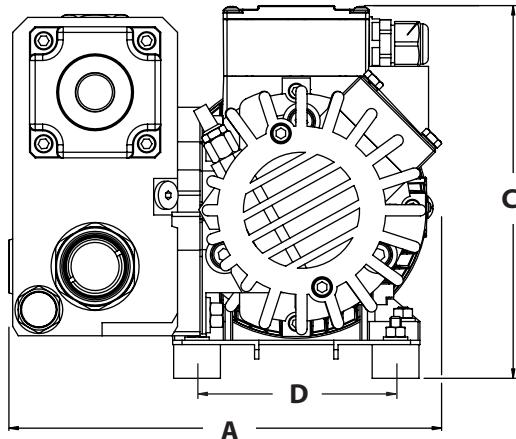

Model	A	B	C	D	E	Inlet/Outlet
<b>RXA-16</b>	9.1"	12.6"	7.8"	4.2	6.1	0.50" NPT

Please contact the factory for precise dimensions.

## CONTACT

