



FEATURES

- Single stage, direct-driven
- Continuous, contactless, oil-free operation
- Energy efficient for substantial savings
- Minimal downtime
- Air-cooled, no water required
- Simple installation
- Virtually maintenance-free
- Low noise levels
- Integrated relief valve
- Includes inlet filter with inlet silencer

APPLICATIONS

Any oil-free application including:


- Transport
- Conveying
- Environmental
- Air sparging
- Fish farms
- Aeration

MOTOR VARIATIONS AVAILABLE

- Explosion-Proof
- Washdown
- 575v
- Single Phase (if applicable)

PERFORMANCE (60HZ)


RCP-62C

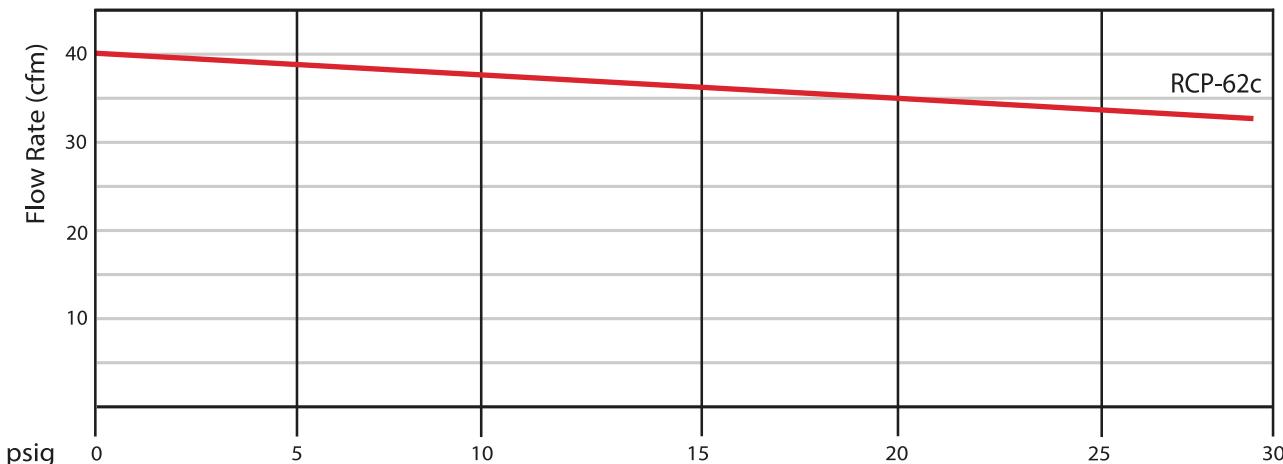

Model	Phase	Displacement (cfm)	Pressure (psig)	hp	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Gear Oil Amt. (L)
RCP-62c	3	40	29.0	5.0	3450	230/460	11.8/5.9	80	165	0.6
RCP-62c-SP	1	40	29.0	5.0	3600	208-230	21.2/19.2	80	165	0.6

All measurements are $\pm 10\%$. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

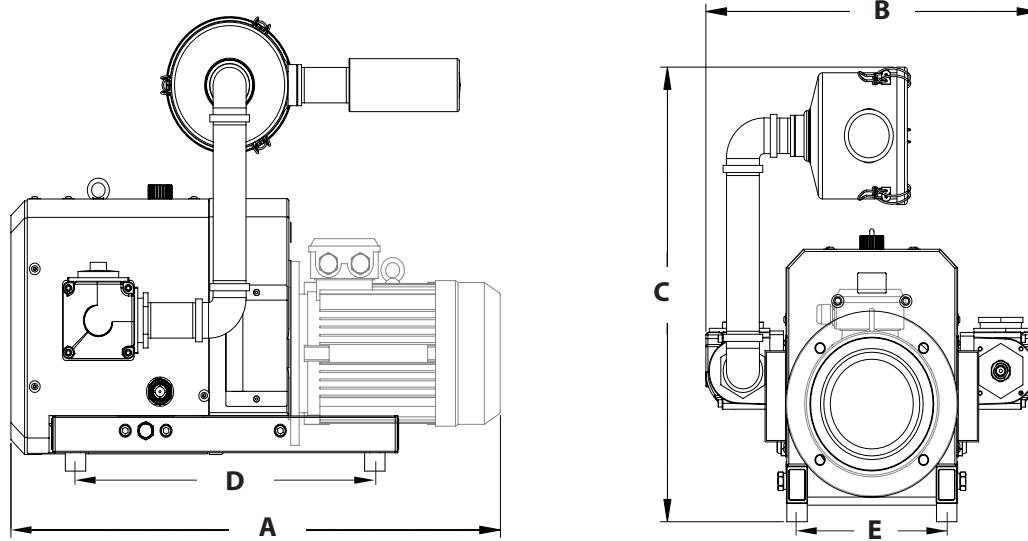

Model	A	B	C	D	E	Inlet	Outlet
RCP-62c	31.7"	11.7"	18.2"	11"	5.7"	1.00" NPT	1.00" NPT

Please contact the factory for precise dimensions.

CONTACT

